



TALESUN

TP6L60M  
TP6L60M(H) **120-cell**

**360 - 380W**

9BB Half-cut Mono Perc



### SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems




### PERFORMANCE WARRANTY

**12** Years  
Quality Assurance

**2** Years  
Power Output Guarantee

Linear Performance Warranty

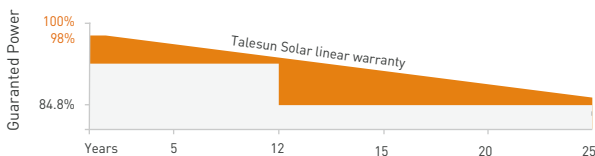

### KEY FEATURES



#### 9BB Half-cut Cell Technology

New circuit design, lower internal current, lower Rs loss Ga doped wafer, attenuation <2% (1st year) / 0.55% (Linear)



#### Significantly Lower the Risk of Hot Spot

Special circuit design with much lower hot spot temperature



#### Excellent Anti-PID Performance

2 times of industry standard Anti-PID test



#### Wider Application

No water-permeability and high wear-resistance, can be widely used in high-humid, windy and dusty area



#### IP68 Junction Box

High waterproof level

