



TALESUN



12

25



保证功率

B R

TP6L72M

TP6L72M(H) **144-cell**

435 - 455W



PID
Anti

PID
85% /85% RH




IP68



| | STC | NMOT | STC | NMOT | STC | NMOT | STC | NMOT | STC | NMOT |
|--|-------|------|-------|------|-------|------|-------|------|-------|------|
| | 435 | 324 | 440 | 328 | 445 | 332 | 450 | 335 | 455 | 339 |
| | 40.3 | 37.6 | 40.5 | 37.8 | 40.7 | 38.0 | 40.9 | 38.2 | 41.1 | 38.4 |
| | 10.80 | 8.62 | 10.87 | 8.67 | 10.94 | 8.73 | 11.01 | 8.78 | 11.08 | 8.84 |
| | 49.0 | 45.6 | 49.2 | 45.8 | 49.4 | 46.0 | 49.6 | 46.2 | 49.8 | 46.4 |
| | 11.33 | 9.15 | 11.40 | 9.20 | 11.47 | 9.26 | 11.54 | 9.32 | 11.61 | 9.37 |
| | 20.00 | | 20.20 | | 20.40 | | 20.70 | | 20.90 | |

| | |
|--|--|
| | 9BB |
| | 144 (6*24) |
| | 2094*1038*35mm (82.44*40.87*1.38) |
| | 23.5kg (51.81lbs) |
| | 3.2mm |
| | |
| | IP68, 3 |
| | 4mm ² (IEC), 12AWG(UL) 300mm |
| | T01/LJQ-3-CSY/MC4/MC4-EVO2 |

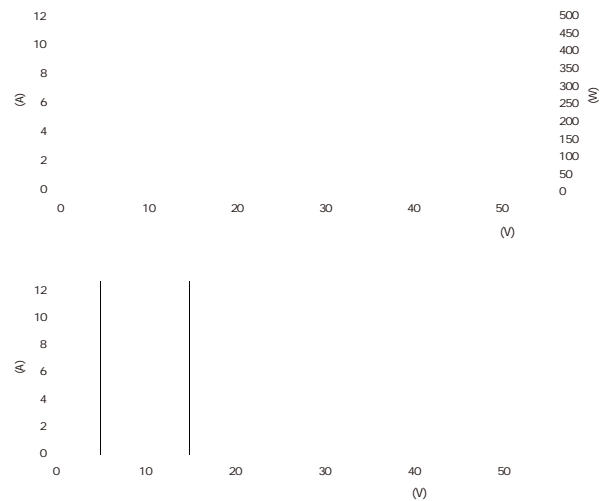

| | |
|--|----------------|
| | 1000V/1500V/DC |
| | -40°C~+85°C |
| | 20A |
| | Class |
| | |
| | |

| | | |
|--|-----|---------|
| | 31 | 31(USA) |
| | 715 | 682 |

