




FD6172M **144-cell**

435 - 455l

9BB


PERC

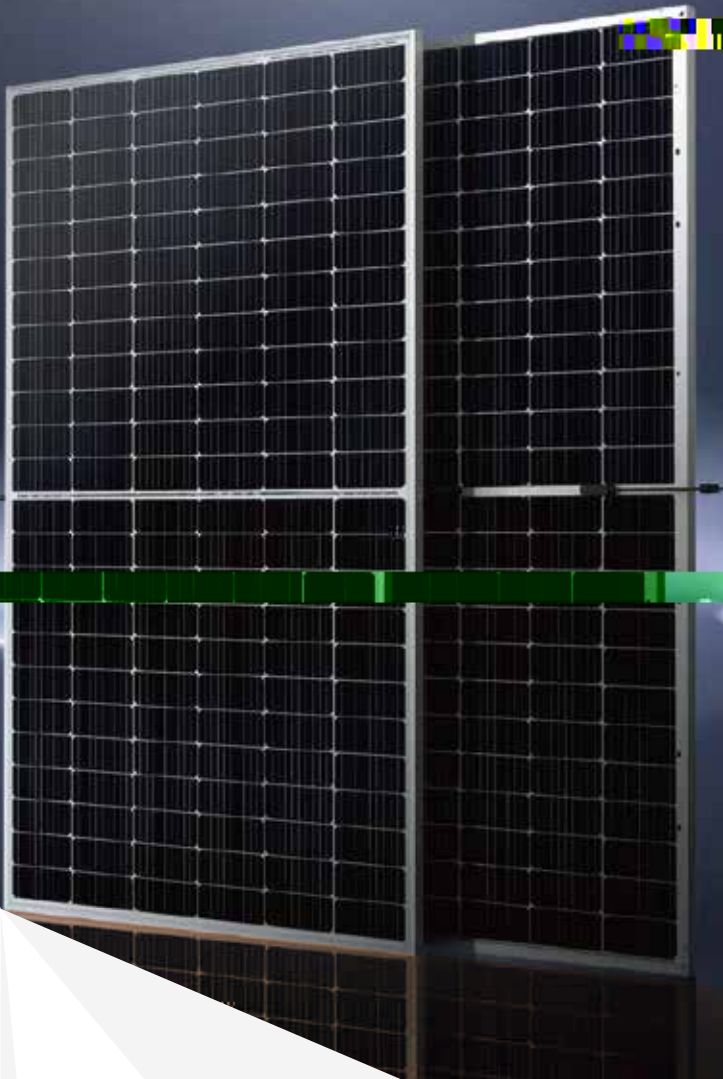

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



12 30

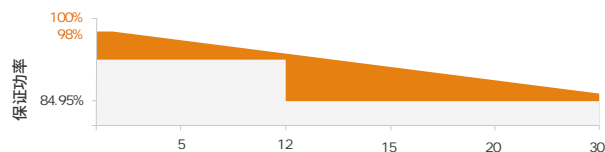

9BB

2% 0.45%

5% - 25%

**PID**  
Anti

PID  
85 / 85% RH 192



	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	435	323	323(Q							
	41.4	38.7	7 3R	41			.0	3		4
	10.51	8.36								
	49.8	46.6								
	11.16	9.0	3		32	11.16				
	20.00			20.20		20.50		20.70		20.90

323

	5%	10%	15%	20%	25%
	462	484	506	528	550
	41.6	41.6	41.6	41.6	41.6
	11.11	11.64	12.17	12.70	13.23
	50.0	50.0	50.0	50.2	50.2
	11.78	12.34	12.90	13.46	14.03

	9BB
	144 (6*24)
	2094*1038*30_ _ (82.44*40.87*1.18 )
	28.0] Y (61.73Te)
	2.0_ _
	2.0_ _
	IP68 3
	4_ _ , (IEC), 12AI G(GL) 300_ _
	F01/LJQ-3-CEK/MC4/MC4-EHO2

⊗

⊗

(H)

12  
10  
8  
6  
4  
2  
0


(H)

	36	36(USA)
	792	648

