

BISTAR

TP8F54M
TP8F54M(H) **108-cell**

540 - 560W

12BB PERC




体系及产品认证

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系

质量保证

12

25

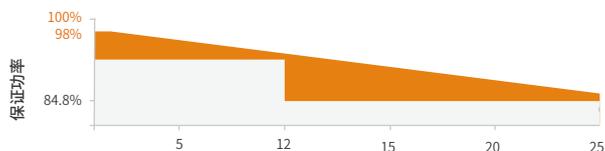

产品特性



12BB半片电池技术

2%

0.55%



显著降低热斑风险



更低度电成本

2%



优秀的抗PID性能

PID
85 / 85% RH 192



IP68接线盒

| | STC | NMOT |
|--|-----|------|-----|------|-----|------|-----|------|-----|------|
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

| | |
|--|--|
| | 12BB |
| | 108 (6*18) |
| | 1961*1303*35mm (77.20*51.30*1.38) |
| | 28.5kg (62.83lbs.) |
| | |
| | |
| | IP68, 3 |
| | 4mm ² (IEC), 12AWG(UL) 300mm |
| | T01/LJQ-3-CSY/MC4/MC4-EVO2 |

