




r0456 5 0086 u



12 2 ■

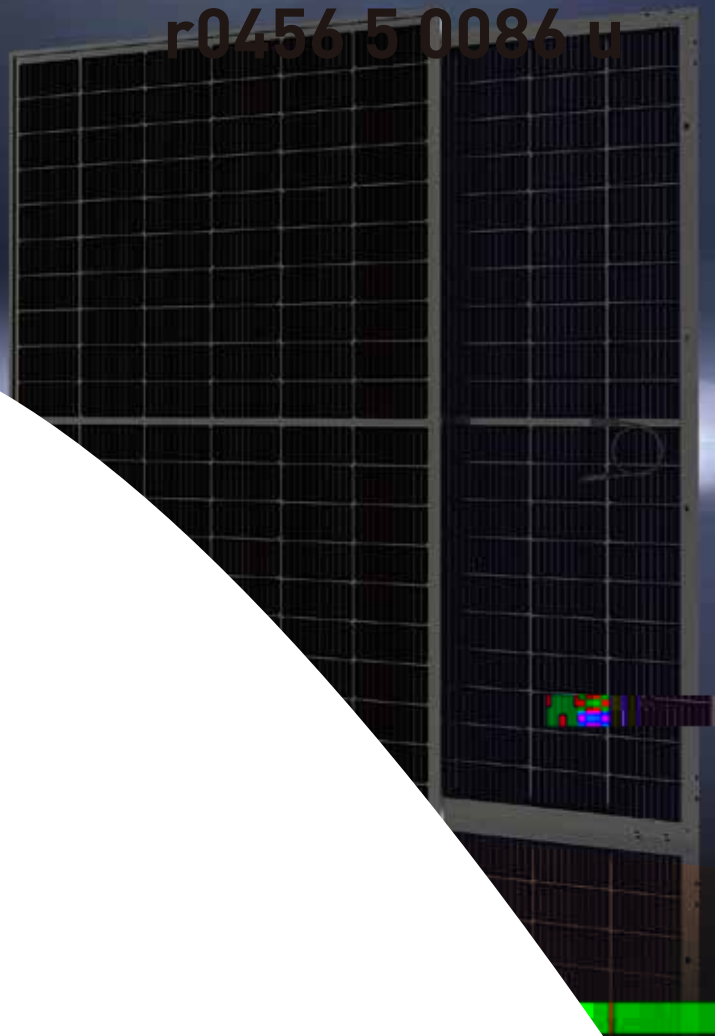

ELECTRICAL CHARACTERISTICS


Testing Condition	STC	N OT	STC	N OT	STC	N OT	STC	N OT	STC	N OT
Maximum Power (P _{max})										
Operating Voltage (V _{mp})										
Operating Current (I _{mp} A)										
Open-Circuit Voltage (V _{oc})										
Short-Circuit Current (I _{sc} A)										
Module Efficiency (%)										

STC: Irradiance 1000 W/m², Spectra at A 1.5, Module Temperature 25°C. Power output tolerance: 0~+5%, Test uncertainty for P_{max}: ±3%
 N OT: Irradiance 800 W/m², Spectra at A 1.5, Ambient Temperature 20°C, Wind speed 1m/s

MECHANICAL CHARACTERISTICS

Cell Type	
No. of Cells	
Module Dimensions	
Weight	
Front Glass	
Frame	
Junction Box	
Output Cables	
Connectors	

I-V CURVE

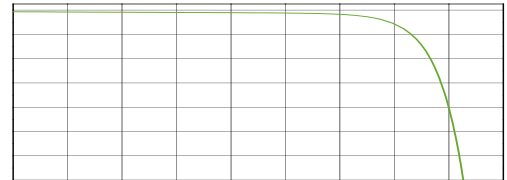

APPLICATION CONDITIONS

Maximum System Voltage	
Operating Temperature	
Maximum Series Fuse	
Safety Protection Class	II

TECHNICAL DRAWINGS

TEMPERATURE CHARACTERISTICS

Temperature Coefficient of P _{max}	
Temperature Coefficient of V _{oc}	
Temperature Coefficient of I _{sc}	
Nominal Module Operating Temperature (N OT)	

PACKING CONFIGURATION

Pieces Per Pallet	
Pieces Per Container(40'HQ)	



TALESUN

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Suzhou Talesun Solar Technologies Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.