




# BIPRO

TM3G48M **96-cell**

435 - 455 W

16BB N

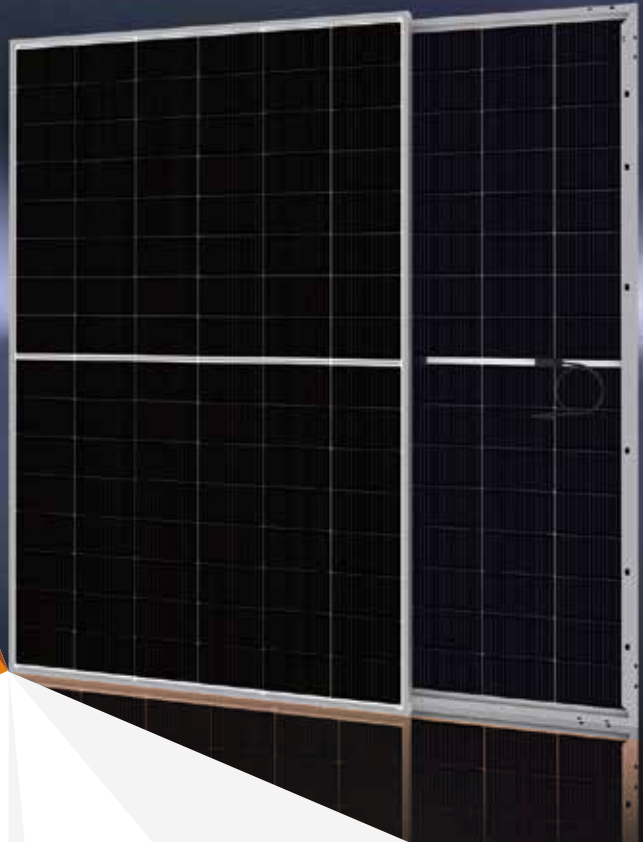

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



15

30



保证功率



LCOE



[www.talesun.com](http://www.talesun.com)

[marketing.hq@talesun.com](mailto:marketing.hq@talesun.com)

\* GL-CN-Version 2024.04.10

	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	21.80		22.00		22.30		22.50		22.80	

	5%	10%	15%	20%	25%
	467	490	512	534	556
	29.79	29.79	29.79	29.79	29.79
	15.69	16.43	17.18	17.93	18.68
	35.42	35.42	35.42	35.42	35.42
	16.62	17.41	18.20	19.00	19.79

	N	16BB
	96 (6*16)	
	1762*1134*30mm (69.37*44.65*1.18 )	
	24.7kg (54.45lbs)	
	IP68, 3	
	4mm <sup>2</sup> (IEC), 12AWG(UL) 350mm(+),250mm(-)	
	T01/LJQ-3-CSY/MC4/MC4-EVO2	